


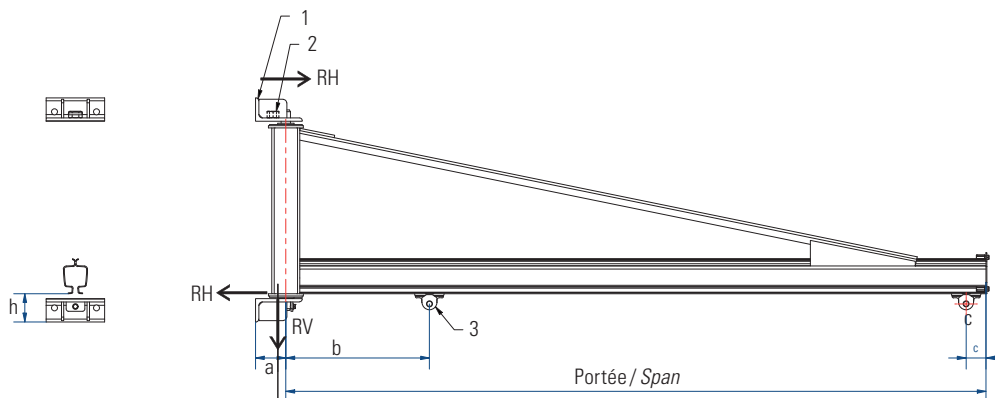
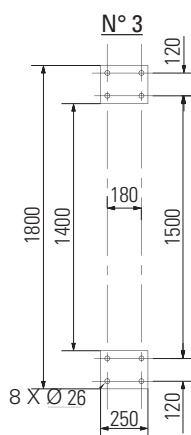
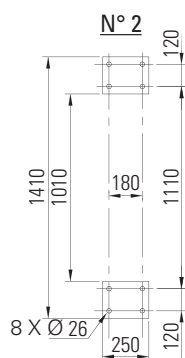








1	Fixation N°
2	Fixation N°
3	Chariot porte-palan
	Hoist trolley



Détail des fixations / Fixation information



DESCRIPTIF

- Potence murale type PMTC profil creux COMEGYSTEME pour service intérieur, à rotation 180°, à flèche triangulée.
- Ce type de potence ne peut pas être motorisé.
- Les réactions RH et RV s'entendent sous charge nominale.
- Fixation par boulons M24 classe 10.9 (non fournis).
- Protection : grenaillage SA 2.5 + peinture poudre polyester 60 microns C2.
- Finition jaune RAL 1028.
- Chariot porte-palan inclus.
- Ligne d'alimentation incluse.
- Vitesse de levage maximum = 16 m/min.

OPTIONS

- Interrupteur mural cadenassable.
- Colonne montante.
- Ralentisseur de rotation (adaptable après coup sans intervention mécanique ni soudure).
- Butées de rotation à souder au montage ou réglables.
- Blocage de rotation 1 ou multiposition.
- Palan électrique ou manuel.

FIXATIONS

- Il convient de vérifier la tenue des supports (poteau ou mur) destinés à recevoir ces potences, en fonction des réactions RH et RV majorées des coefficients en vigueur.

DESCRIPTION

- COMEGYSTEME hollow-section wall jib crane for indoor use, 180° rotation, with overbraced beam.
- This type of jib crane cannot be motorized.
- Horizontal and vertical reactions are understood to be under nominal load.
- Attached with M24, 10.9 grade bolts (not provided).
- Protection: grinding SA 2.5 + polyester powder painting 60 micron C2.
- RAL 1028 yellow finish.
- Hoist trolley provided.
- Power supply cable provided.
- Maximum hoisting speed = 16 m/min.

OPTIONS

- Lockable main switch.
- Standpipe.
- Rotation slowing device (adaptable afterwards without welding or mechanical intervention).
- Rotation stops to weld onto the assembly or adjustable.
- Single or multi-position rotation lock.
- Electric or manual hoist.

FIXATION

- We recommend you verify the strength of the supports (post or wall) that will be holding up the jib cranes, according to horizontal and vertical reactions plus the coefficients in effect

CMU	Portée	a	b	c	h	RH	RV	Couple de renversement	Kit de fixation (option)	Fixation	Chariot	Poids
Max. capacity	Span							Maximum moment	Fixation kit (option)	Fixation	Trolley	Weight
Kg	m	mm	mm	mm	mm	DaN	DaN	DaN.m	N°	N°	N°	Kg
50 (15)	2	100	370	68,5	120	224	134	170	KF2	1	CI	57
	2,5	100	370	68,5	120	292	142	222	KF2	1	CI	64
	3	100	470	68,5	120	365	149	278	KF2	1	CI	69
	3,5	100	470	68,5	120	443	157	337	KF2	1	CI	75
	4	100	570	68,5	120	526	164	400	KF2	1	CI	80
	4,5	100	570	68,5	120	614	172	467	KF2	1	CI	87
	5	100	670	68,5	120	707	179	538	KF2	1	CI	92
	5,5	100	690	85	120	805	187	612	KF2	1	CII-L-A	135
	6	100	790	85	120	908	194	690	KF2	1	CII-L-A	144
	6,5	100	790	85	120	1016	202	772	KF2	1	CII-L-A	153
	7	100	890	85	120	1128	209	858	KF2	1	CII-L-A	162
	7,5	100	890	85	120	1246	217	947	KF2	1	CII-L-A	172
	8	100	990	85	120	1368	224	1040	KF2	1	CII-L-A	180
80 (15)	2	100	370	68,5	120	311	167	236	KF2	1	CI	57
	2,5	100	370	68,5	120	400	175	304	KF2	1	CI	64
	3	100	470	68,5	120	495	182	377	KF2	1	CI	69
	3,5	100	470	68,5	120	595	190	452	KF2	1	CI	75
	4	100	570	68,5	120	700	197	532	KF2	1	CI	80
	4,5	100	570	68,5	120	810	205	615	KF2	1	CI	87
	5	100	670	68,5	120	924	212	703	KF2	1	CI	92
	5,5	100	690	85	120	1044	220	793	KF2	1	CII-L-A	135
	6	100	790	85	120	1168	227	888	KF2	1	CII-L-A	144
	6,5	100	790	85	120	1298	235	986	KF2	1	CII-L-A	153
	7	100	890	85	120	1432	242	1089	KF2	1	CII-L-A	162
	7,5	100	890	85	120	1572	250	1194	KF2	1	CII-L-A	172
	8	100	990	85	120	1716	257	1304	KF2	1	CII-L-A	180
125 (50)	2	100	370	68,5	120	559	274	494	KF2	1	CI	52
	2,5	100	370	68,5	120	704	281	618	KF2	1	CI	58
	3	100	490	85	120	842	288	744	KF2	1	CII-L-A	63
	3,5	100	490	85	120	987	295	873	KF2	1	CII-L-A	92
	4	100	590	85	120	1145	302	1005	KF2	1	CII-L-A	100
	4,5	130	590	85	120	1362	375	1240	KF3	1	CII-L-A	134
	5	130	690	85	120	1520	390	1398	KF3	1	CII-L-A	146
	5,5	130	690	85	120	1862	402	1561	KF3	1	CII-L-A	155
	6	130	790	85	120	2066	415	1729	KF3	1	CII-L-A	165
	6,5	130	790	85	120	2372	428	1901	KF3	1	CII-L-A	175
	7	130	890	85	120	2599	459	2078	KF3	1	CII-L-A	203
	7,5	130	890	85	120	2830	475	2260	KF3	1	CII-A	216
	8	130	990	85	120	3070	489	2447	KF3	1	CII-A	227
250 (50)	2	100	390	85	120	912	384	704	KF2	1	CII-L-A	66
	2,5	100	390	85	120	1154	391	878	KF2	1	CII-L-A	75
	3	100	490	85	120	1316	398	1054	KF2	1	CII-L-A	83
	3,5	130	490	85	120	1657	461	1300	KF3	1	CII-L-A	116
	4	130	590	85	120	1829	472	1499	KF3	1	CII-L-A	124
	4,5	130	590	85	120	2184	485	1703	KF3	1	CII-L-A	134
	5	130	690	85	120	2395	500	1911	KF3	1	CII-L-A	146
	5,5	130	690	85	120	2737	512	2124	KF3	1	CII-L-A	155
	6	130	790	85	120	3022	525	2342	KF3	1	CII-L-A	165
	6,5	130	790	85	120	3313	538	2564	KF3	1	CII-A	213
	7	130	890	85	120	3612	569	2791	KF3	1	CII-A	244
	7,5	130	890	85	120	4287	737	3023	KF3	1	CII-A	412
	8	130	990	85	225	4649	755	3585	KF4	2	CII-H-A	430

(...) Poids estimé du palan.

(...) Estimated weight of the hoist.

CMU	Portée	a	b	c	h	RH	RV	Couple de renversement	Kit de fixation (option)	Fixation	Chariot	Poids
Max. capacity	Span							Maximum moment	Fixation kit (option)	Fixation	Trolley	Weight
Kg	m	mm	mm	mm	mm	DaN	DaN	DaN.m	N°	N°	N°	Kg
500 (50)	2	130	390	85	120	1636	701	1318	KF3	1	CII-L-A	90
	2,5	130	390	85	120	2059	713	1640	KF3	1	CII-L-A	99
	3	130	490	85	120	2520	724	1967	KF3	1	CII-L-A	107
	3,5	130	490	85	120	2921	736	2299	KF3	1	CII-L-A	116
	4	130	590	85	120	3414	747	2635	KF3	1	CII-A	147
	4,5	130	590	85	120	3812	760	2976	KF3	1	CII-A	160
	5	130	690	85	120	4500	787	3322	KF3	1	CII-A	187
	5,5	130	690	85	225	3706	934	3827	KF4	2	CII-A	334
	6	130	790	85	225	4228	953	4211	KF4	2	CII-H-A	353
	6,5	130	790	85	225	4473	971	4603	KF4	2	CII-H-A	371
	7	130	890	85	225	4866	992	5002	KF4	2	CII-H-A	392
	7,5	130	890	85	225	5267	1012	5408	KF4	2	CII-H-A	412
	8	130	990	85	225	5676	1030	5821	KF4	2	CII-H-A	430
1000 (100)	2	130	390	90	120	3217	1301	2596	KF3	1	CII-B	101
	2,5	130	390	90	120	4033	1313	3218	KF3	1	CII-B	113
	3	130	490	90	225	4855	1328	3845	KF4	2	CII-H-B	128
	3,5	130	490	90	225	4282	1427	4477	KF4	2	CII-H-B	227
	4	130	590	90	225	4911	1480	5113	KF4	2	CII-H-B	280
	4,5	130	590	90	225	5543	1498	5858	KF4	2	CII-H-B	298
	5	130	690	90	225	6307	1517	6528	KF4	2	CII-H-B	317

(...) Poids estimé du palan.

(...) Estimated weight of the hoist.